

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/518965



(43) International Publication Date
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number
WO 2004/001121 A2

- (51) International Patent Classification⁷: D06M
- (21) International Application Number:
PCT/US2003/019761
- (22) International Filing Date: 20 June 2003 (20.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/390,860 20 June 2002 (20.06.2002) US
- (71) Applicants (*for all designated States except US*):
UNIVERSITY OF GEORGIA RESEARCH FOUNDATION, INC. [US/US]; 621 Boyd Graduate Studies Research Center, Athens, GA 30602-7411 (US). AKZO NOBEL N.V. [NL/NL]; Velperweg 76, P.O. Box 9300, NL-6800 SB Arnhem (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): YANG, Charles, Q. [US/US]; 189 Elderberry Circle, Athens, GA 30605 (US). WU, Weidong [CN/US]; 110 Rogers Road, Apt. N206, Athens, GA 30605 (US). STOWELL, Jeffrey, K. [US/US]; 237 Mulberry Road, Ramsey, NJ 07446 (US). WEIL, Edward, D. [US/US]; 200 East 57th Street, Apt. 5L, New York, NY 10022 (US).
- (74) Agent: FENNELLY, Richard, P.; Akzo Nobel Inc., Intellectual Property Department, Dobbs Ferry, NY 10522-3408 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— *without international search report and to be republished upon receipt of that report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: A DURABLE FLAME RETARDANT FINISH FOR CELLULOSIC MATERIALS

(57) Abstract: A composition, for treating a cellulosic material, contains a hydroxyl-functional phosphorus ester containing at least two phosphorus atoms therein, a melamine formaldehyde resin, optionally one or more N-methylol functional resin(s), and a curing catalyst.

BEST AVAILABLE COPY

WO 2004/001121 A2

A DURABLE FLAME RETARDANT FINISH FOR CELLULOSIC MATERIALS

Background of the Invention

5 The present invention relates to flame retardant treatments for cellulose-containing materials, such as cotton and cotton blends (for example, cotton/Nomex®, cotton/Kevlar®, cotton/nylon-6, cotton/nylon-6,6, cotton/polyester, etc.), which renders such materials durable to both laundering and dry cleaning operations.

10 There are currently several different types of chemical finishes that can be applied to cellulosic materials to impart flame retardant ("FR") properties. Of these systems, only a few create finished fabrics that can be laundered and dry-cleaned without losing their FR qualities. These treatments are generally referred to as "durable FR
15 finishes" and, for the most part, can be summed up by referencing two types of commercial finishing chemistries: precondensate ammonia cure; and N-methylol functional phosphorus esters. It is surprising that more than thirty years have passed since these chemistries were first developed, and even more surprising that other technologies
20 have been developed to supplant their hold on the FR cotton market during that period of time. For persons that have used and/or read about these finishing chemistries, it is understandable why they remain the dominant means for creating durable FR cotton fabrics. Nevertheless, those same people will also admit that there are
25 limitations and, in many cases, undesirable facets to these finishing techniques.

There have been several versions of the tetrakis(hydroxymethyl)-phosphonium chloride ("THPC") cross-linking chemistry used over the years, with the precondensate-NH₃ process being the most recent of
30 these versions. Although the precondensate-NH₃ process may easily be the most durable treatment on the market, the technology is far from simple. The application process involves the use of an ammoniation chamber and strict control of application conditions to obtain consistent results. In addition to demanding application conditions,

the costs for implementing this technology, licensing expenses, and the regulatory issues associated with the use of ammonia gas make this technology far from ideal, especially to new arrivals to the market.

5 N-methylol functional phosphorus chemistry, although not as durable as the precondensate-NH₃ chemistry, has also found a wide customer base in the FR cotton industry due to its ease of application and its use of commonly available pad/dry/cure textile finishing equipment. Most N-methylol functional phosphorus chemistry
10 is based on the use of dimethyl (N-hydroxymethylcarbamoylethyl)phosphonate in conjunction with a melamine formaldehyde ("M-F") crosslinking resin to enhance its FR performance, both of which contribute to the emission of significant levels of formaldehyde during both fabric application and the lifetime of the treated
15 garments.

The need for the present invention arose from the limitations listed above, and the desire for alternative FR finishing chemistries and potential new markets (e.g., furniture upholstery, raised surface fabrics) that only need an FR treatment to withstand a limited number
20 of machine launderings. The main goals of the present invention were to develop an FR finishing chemistry that would have minimal effect on the physical characteristics of the treated fabrics (e.g., on strength retention, hand, dye shade, etc.), would be applicable using the traditional pad/dry/cure finishing equipment, and would use only
25 commonly available commodity chemicals. The outcome of the invention was the development of several new FR finishing chemistry embodiments based on the use of a hydroxyl-functional organophosphorus FR additive in certain durable press ("DP") finishing formulations containing commonly available components.

30

Summary of the Present Invention

The conceptualization and subsequent development of the new FR
5 finishing chemistry based on the use of a hydroxyl-functional
organophosphorus FR additive with commonly available durable press
("DP") finishing resins has been validated on full-scale applications
equipment in several textile mills. The durability of the new FR
finishes is believed to be based on the covalent binding between the
10 FR additive and dimethyloldihydroxyethylene urea (DMDHEU) or
melamine-formaldehyde (M-F) and that between cotton cellulose and
DMDHEU or M-F. It is accomplished by using a formulation containing
that hydroxyl-functional FR additive, a melamine-formaldehyde resin,
optional N-methylol functional crosslinking resin(s), and a curing
15 catalyst using common pad/dry/cure application equipment. The
Figure, which forms a part of the instant specification, illustrates
this novel chemistry.

Description of the Preferred Embodiments

20 Although the concept of creating a semi-durable (five or less
launderings) FR finish from a certain type of hydroxyl-functional
phosphorus-containing ester compound and an N-methylol functional
resin is known in the literature (see U.S. Patent No. 3,746,572,
which is incorporated herein in its entirety), previous results were
25 quite limited in both the finish durability and the flame resistant
properties of the treated fabrics. At best, these previous systems
resulted in fabrics that could withstand at most five home
launderings. Given this restriction and the commercial need for more
durable and more flame resistant treatments, commercialization of
30 such an older chemistry was never warranted.

An additional example of a flame retardant finishing chemistry
similar to that described above is mentioned in PCT Patent

Publication No. WO 00/29662. Although most of these functional resin systems show little commercial potential, the dimethyloldihydroxyethylene urea (DMDHEU) flame retardant resin systems are the exception, showing increased durability characteristics that may have commercial potential. Nevertheless, even though these systems show higher levels of durability than the previous chemistry described in U.S. Patent No. 3,746,572, the practical utility of these new FR systems is limited to low addition level application systems such as on highly flammable general wearing apparel that fail to pass a simple 45-degree angle burn test. Using FR/DMDHEU add-on levels high enough to pass a vertical burn test will result in unacceptable fabric strength loss percentages equal to and sometimes exceeding 40%. Fabric strength loss percentages above 30% are rarely acceptable in commercial fabrics.

The present invention has improved this general area of chemistry and has resulted in the development of novel FR finishing systems that can hold up to more than 20-25 home launderings, while satisfying both a minimal strength loss to the fabric construction and the flammability requirements of a vertical burn test. These finishing chemistries are based on the use of melamine-formaldehyde ("M-F"), by itself or with an additional N-methylol functional resin (e.g., DMDHEU), in combination with non-volatile hydroxyl-functional phosphorus esters containing a high level of phosphorus (for example, a hydroxyl number no more than about 300 mg KOH/ g and a phosphorus content of no less than about 14 wt%). Examples of these products include the FYROLTEX® HP product and the high hydroxyl version of FYROL® PNx, both available from Akzo Nobel Functional Chemicals LLC.

Out of the FR products evaluated during the effort in developing the present invention, systems containing the high OH# oligomeric products FYROLTEX® HP and high hydroxyl version of FYROL® PNx showed efficacy in creating durable FR finishes. The FYROL® PNx product (OH#: <5 mg KOH/g), as well as the FYROL® 6 product (OH#: >400 mg


KOH/g) both imparted poor FR properties to treated fabrics. As expected, the low hydroxyl product FYROL[®] PNx did not contain a sufficient quantity of functionality to bond it to the N-methylol functional resins. On the other hand, the FYROL[®] 6 product (the FR additive discussed in U.S. Patent No. 3,746,572), which does contain hydroxyl functionality, also failed to provide an adequate FR finish.

In the case of the FYROL[®] 6 product, the composition actually contained too many reactive groups per phosphorus atom (two hydroxyl groups per molecule and per phosphorus atom), resulting in the consumption of a large amount of the crosslinking resin with fixation of only a small amount of the FR additive onto the fabric substrate.

Given that the level of the crosslinking resin used drastically affects the physical properties of the treated fabrics (e.g., strength, hand, etc.), the high levels of resin required for additives like FYROL[®] 6 makes them commercially impractical and undesirable. In addition to the above problem and its tendency to yellow fabrics, FYROL[®] 6 also displayed volatility problems under fabric curing conditions. Later phosphorus analysis of cured fabric samples showed a significant portion of the FR additive had volatilized into the ventilation system of the oven during application.

The results of the above experiments identified non-volatile hydroxyl-functional phosphorus esters containing a high level of phosphorus, a moderate level of hydroxyl functionality, and a thermal decomposition/volatilization temperature above 160°C as the most desirable group of FR additives in these finishing systems. The combination of these FR product candidates (e.g., FYROLTEX[®] HP) and M-F based binding resin systems (including M-F/DMDHEU combinations) were developed to give a more desirable commercial FR finish over previously reported DP-based finishing systems (e.g., as described in U.S. Patent No. 3,746,572 and PCT Patent Publication No. WO 00/29662).

Hydroxy-functional phosphorus ester candidates for use herein conform to the following formula:



where R_1 is independently selected from alkyl and hydroxyalkyl, R_2 is independently selected from alkyl, alkoxy, and hydroxyalkoxy, and n is equal to or greater than 1.

In the composition of the present invention, the relative parts by weight of the essential components of the composition can be varied within the following exemplary limits: hydroxyl-functional phosphorus ester (from about 4 wt% to about 50 wt%), N-methylol functional resin(s) (from about 2 wt% to about 30 wt%), and a curing catalyst (from about 0.1 wt% to about 15 wt%), with water and other desired additives (fabric softener(s), surfactant(s), brightener(s), pH control agent(s), and the like) also being optionally present. The present formulation has a preponderant amount of the flame retardant component, as compared to the resin component, further differentiating it from the formulations described in PCT Patent Publication No. WO 00/29662.

Examples illustrating certain experimental work employing the FYROLTEX[®] HP and high OH# version of FYROL[®] PNx with the binding resin systems M-F and DMDHEU/M-F, in accordance with the present invention is given below:

EXAMPLES

1. Binding Resins and Other Chemicals

- FR additives used: FYROLTEX[®] HP or High OH# FYROL[®] PNX, which are hydroxyl functional oligomeric phosphorus ester products supplied by Akzo Nobel.
- M-F resins used: ECCOREZ M300 supplied by Eastern Color & Chemical or AEROTEX[®] M-3 supplied by Noveon, which are trifunctional methylated melamine resins.
- Glyoxal resin used: FREEREZ[®] 900 supplied by Noveon, an unbuffered, uncatalyzed DMDHEU resin.
- Catalysts used: A 70% solution of phosphorous acid (also known as phosphonic Acid) supplied by Akzo Nobel; Catalyst 531 supplied by Omnova Solutions, a combination of magnesium chloride and citric acid solution; and Catalyst RD supplied by Omnova Solutions, ammonium chloride solution.
- Wetting agent: TERGITOL[®] TMN-6 supplied by Dow Chemical, an alcohol ethoxylate surfactant.
- Softener: CROSSLINK-SS305 supplied by Vulcan Performance Chemicals, a proprietary reactive silicon softener.

2. Pad-Dry-Cure Equipment Used

- Pad applicator (laboratory size): an instrument used to apply a solution to fabric at a specified level (% wet-pickup).
- Curing oven (laboratory size): an oven that is used to dry and subsequently to cure the chemically treated fabrics at high temperatures.
- Washing machine (household size): used for laundering fabrics after chemical treatment and curing with AATCC Standard Detergent 1993.

3. Fabrics

- 100% Cotton scoured and bleached printcloth weighing 108 g/m² (Testfabrics Style 400).
- 100% Cotton dyed twill weave weighing 246 g/m².
- 5 • 50/50 Cotton/Nylon-6,6 dyed blend printed twill weave weighing 254 g/m²
- 35/65 Cotton/Nomex[®] blend twill weave weighing 192 g/m².

4. Fabric Aftertreatments

- 10 • Washing at 105°F without the used of a detergent (water wash).
- Launderings according to AATCC Test Method 124-1996 at 105°F with AATCC Standard Detergent 1993 (home laundering washing/drying - HLWD).

5. Fabric Flammability Testing Methods

- 15 • Limiting Oxygen Index: ASTM D2863-00.
- Vertical Burn: ASTM D6413-99.

6. Fabric Physical Property Testing Methods

- 20 • Tensile Strength: ASTM D5035-90.
- Tearing Strength: ASTM D1424-96.

General Application Conditions

25 The test fabrics were immersed into the desired test solution containing the FR finish formulation, then fed through a pad applicator to ensure that both the desired level of chemistry was applied to the fabric and also that it was applied in a uniform manner. Although it was standard practice to pad the chemicals on twice using two dips and two nips during the laboratory trials, the
30 chemicals were only padded once in the full-scale mill trials and showed little difference in ultimate performance. After achieving

the desired wet pick-up level, the fabrics were dried and cured. After curing, a short afterwash procedure was performed at 140°F to remove any unbound chemicals.

5 Experimental Results

I. OLIGOMERIC FR PRODUCT WITH A M-F BINDING RESIN APPLIED TO 100% COTTON FABRICS

108 G/M² Cotton Twill Treated with FYROLTEX® HP/M-F

Home Laundering	LOI (%) *
Before Water Wash	33.0
After Water Wash	31.5
1 HLWD Cycle	30.7
5 HLWD Cycles	29.8
10 HLWD Cycles	28.9

10 *Even though there is no pass/fail standard for the LOI measurement, equal to or over 27% is generally considered an acceptable pass/fail threshold for a vertical burn evaluation.

Notes:

- 15 1. Formula: 16.0% FYROLTEX® HP, 8.0% ECCOREZ® M300
2. The pH of the finish solution was adjusted to 4.0 by addition of H₃PO₃
3. A wet pick-up of 115% was achieved
4. Fabric: 100% cotton twill fabric weighing 108g/m²
20 5. Drying Condition: 180°F for 3.0 minutes
6. Curing Condition: 330°F for 2.5 minutes

246 G/M² Cotton Twill Treated with FYROLTEX[®] HP/M-F

Home Laundering	LOI (%) *
Before Water Wash	33.5
After Water Wash	30.5
1 HLWD Cycle	30.2
5 HLWD Cycles	29.0
10 HLWD Cycles	28.0

*Even though there is no pass/fail standard for the LOI measurement, equal to or over 27% is generally considered an acceptable pass/fail threshold for a vertical burn evaluation.

Notes:

1. Formula: 16.0% FYROLTEX[®] HP, 8.0% ECCOREZ[®] M300
2. The pH of the finish solution was adjusted to 4.0 by addition of H₃PO₃
3. A wet pick-up of 75% was achieved
4. Fabric: 100% cotton twill fabric weighing 246g/m²
5. Drying Condition: 180°F for 3.0 minutes
6. Curing Condition: 330°F for 2.5 minutes

An Example is also given to show the performance of the high OH# version of FYROL[®] PNx to that of FYROLTEX[®] HP, where both treatments show adequate FR performance. The lower LOI numbers for the High OH# FYROL[®] PNx treated fabrics are in part due to the product's lower phosphorus content; FYROLTEX[®] HP has a percent phosphorus of 20.5 wt% and high OH# FYROL[®] PNx only 15.5 wt%.

246 G/M² Cotton Twill Treated with FYROLTEX[®] HP/M-F and High OH# FYROL[®] PNx/M-F

FR (%)	M-F (%)	pH	LOI (%) *		
			Before	Water Wash	5 HLWD
FYROLTEX [®] HP 28%	12	4.0	36.5	34.3	33.1
High Hydroxyl FYROL [®] PNx	12	4.0	31.8	31.5	30.5

*Even though there is no pass/fail standard for the LOI measurement, equal to or over 27% is generally considered an acceptable pass/fail threshold for a vertical burn evaluation.

Notes:

1. Formula: FR Additive, ECCOREZ® M300
2. The pH of the finish solution was adjusted to 4.0 by addition of H₃PO₃
3. Fabric: 100% cotton twill fabric weighing 246g/m²
4. Drying Condition: 180°F for 3.0 minutes
5. Curing Condition: 330°F for 2.5 minutes

II. OLIGOMERIC FR PRODUCT WITH DMDHEU/M-F BINDING SYSTEMS APPLIED TO 100% COTTON FABRICS

Based on the above observations, work was also completed to evaluate combination DMDHEU/M-F binding systems that would incorporate the high durability of the DMDHEU binding systems and the high FR performance and low strength loss characteristics of the M-F binding systems. The tables below illustrate some of the results:

246 G/M² Cotton Twill Treated with FYROLTEX® HP/DMDHEU/M-F or FYROLTEX® HP/M-F Systems

Formula	LOI (%) *		Tensile Strength		Tear Strength			
	1 HLWD	12 HLWD	Fill (kgf)	Retention (%)	Fill (kgf)	Retention Fill (%)	Warp (kgf)	Retention Warp (%)
1	28.5	27.3	25.3	69	1.69	73	1.55	70
2	28.3	27.2	30.7	83	2.06	89	1.90	86
3	30.8	29.5	35.6	96	2.10	91	1.98	90
Control	-	-	36.9	-	2.32	-	2.21	-

*Even though there is no pass/fail standard for the LOI measurement, equal to or over 27% is generally considered an acceptable pass/fail threshold for a vertical burn evaluation.

Notes:

1. Formula 1: 24% FYROLTEX® HP, 10.0% FREEREZ® 900, 1.0% ECCOREZ® M300, 6.0% Catalyst 531, 4.0% Crosslink-SS305, 0.01% TERGITOL® TMN-6
2. Formula 2: 24% FYROLTEX® HP, 2.0% FREEREZ® 900, 3.0% ECCOREZ® M300, 0.20% H₃PO₃, 4.0% Crosslink-SS305, 0.01% TERGITOL® TMN-6
3. Formula 3: 24% FYROLTEX® HP, 7.0% ECCOREZ® M300, 0.20% H₃PO₃, 4.0% Crosslink-SS305, 0.01% TERGITOL® TMN-6
4. A wet pick-up of about 80% was achieved
5. Drying Condition: 180°F for three minutes
6. Curing Condition: 330°F for two minutes

It is apparent from the data above, that as the level of the M-F resin used was increased and the level of DMDHEU resin was decreased, the improved fabric strength retention properties of the M-F containing systems was impressive. The FR/DMDHEU systems demonstrated a high level of effectiveness in binding the FR component to cotton cellulose and excellent laundering durability. The FR/DMDHEU systems bring with them a level of fabric strength loss similar to that of normal DP-type finishing chemistries (about 30-40% strength loss), the major reason for this is DMDHEU's high capacity to crosslink cotton cellulose. On the other hand, M-F resins are less effective at binding the FR component to cotton cellulose than DMDHEU. As a result, they cause far less cross-linking in cotton and consequently less strength loss in the treated fabrics. In addition to lower strength loss, the M-F resin systems also add an important source of nitrogen to the FR finishing system, thereby boosting their initial FR performance over that of the DMDHEU-based systems.

By combining an M-F resin with a DMDHEU resin in the same formulation, the FR finishing system can take advantage of the benefits imparted by both resin components. The FR/DMDHEU/M-F systems show a high level of flame retardancy after laundering, and at the same time have excellent fabric strength retention properties (80-90%). The DMDHEU resin improves binding of the FR component to cotton and the M-F resin enhances the flame retardant properties of the finish through nitrogen/phosphorus synergism, while also minimizing the overall fabric strength loss.

III. OLIGOMERIC FR PRODUCT AND A DMDHEU/M-F BINDING SYSTEM APPLIED TO COTTON BLEND FABRICS (COTTON/NYLON and COTTON/NOMEX®)

In addition to testing the combination FR/M-F/DMDHEU application formulations to 100% cotton fabrics, trials were also completed on some exemplary cotton blend fabrics. Two examples (namely,

cotton/nylon and cotton/Nomex® blend fabrics) were tested as substrates and the results are set forth below:

254 G/M² Cotton/Nylon Blend Twill Treated with FYROLTEX® HP/DMDHEU/M-F System

Home Laundering	LOI (%) *	Char Length (mm) *
Before Water Wash	28.7	70
1 HLWD Cycle	28.5	78
9 HLWD Cycles	28.1	75
15 HLWD Cycles	27.5	126

*A char length of over 178 is considered passing for the vertical burn test. Even though there is no pass/fail standard for the LOI measurement, equal to or over 27% is generally considered an acceptable pass/fail threshold for a vertical burn evaluation.

Notes:

1. Formula: 40.0% FYROLTEX® HP, 6.0% FREEREZ® 900, 6.0% AEROTEX® M-3, 0.8% Catalyst RD, 0.02% TERGITOL® TMN-6
2. A wet pick-up of 75% was achieved
3. Fabric: 50/50 cotton/nylon blend twill fabric weighing 254 g/m²
4. Drying Condition: 180°F for three minutes
5. Curing Condition: 330°F for two minutes

192 G/M² Cotton/NOMEX® Twill Treated with FYROLTEX® HP/DMDHEU/M-F System

Home Laundering	LOI (%) *	Char Length (mm) *
Before Water Wash	37.1	76
1 HLWD Cycle	35.3	64
12 HLWD Cycles	35.2	74

*A char length of over 178 is considered passing for the vertical burn test. Even though there is no pass/fail standard for the LOI measurement, equal to or over 27% is generally considered an acceptable pass/fail threshold for a vertical burn evaluation.

Notes:

1. Formula: 20.0% FYROLTEX® HP, 1.6% FREEREZ® 900, 2.5% AEROTEX® M-3, 2.0% Catalyst 531, 0.02% TERGITOL® TMN-6
2. A wet pick-up of 89% was achieved
3. Fabric: 35/65 cotton/NOMEX® blend twill fabric weighing 192 g/m²
4. Drying Condition: 180°F for 3.0 minutes
5. Curing Condition: 330°F for 2.0 minutes

Depending on the FR properties, durability requirements, and fabric strength properties (e.g., tensile and tear strength retention) desired for a target end-use application, an appropriate FR/DMDHEU/M-F or FR/M-F system can be formulated to meet those needs.

5 The foregoing Examples are presented merely to illustrate certain embodiments of the present invention and should not be construed in a limiting sense for that reason. The scope of protection sought is set forth in the Claims that follow.

We claim:

1. A composition, for treating a cellulosic material, which
5 comprises a hydroxyl-functional phosphorus ester containing at least two phosphorus atoms therein, a melamine-formaldehyde resin, optionally one or more N-methylol functional resin(s), a curing catalyst.
2. A composition as claimed in Claim 1 wherein the curing
10 catalyst is an ammonium salt.
3. A composition as claimed in Claim 1 wherein the curing catalyst comprises a mixture of a Lewis acid catalyst and a carboxylic acid.
4. A composition as claimed in Claim 3 wherein the carboxylic
15 acid is citric acid.
5. A composition as claimed in Claim 3 wherein the Lewis acid catalyst is magnesium dichloride.
6. A composition as claimed in Claim 1 wherein the curing
20 catalyst is selected from the group consisting of phosphorous acid and phosphoric acid.
7. A composition as claimed in Claim 1 wherein the hydroxyl-functional phosphorus ester is selected from the group consisting of a mixed phosphate/phosphonate ester of CAS No. 70715-06-9 and a phosphate ester formed by reacting triethyl phosphate, phosphorus
25 pentoxide, ethylene glycol and ethylene oxide.
8. A composition as claimed in Claim 1 wherein the hydroxyl-functional phosphorus ester is a mixed phosphate/phosphonate ester.
9. A composition as claimed in Claim 1 wherein the hydroxyl-functional phosphorus ester is a polyphosphate.
- 30 10. A composition as claimed in Claim 1 wherein the hydroxyl-functional phosphorus ester is a polyphosphonate.


11. A composition as claimed in Claim 1 wherein the composition contains DMDHEU as the N-methylol functional resin.

12. A composition as claimed in Claim 1 wherein the curing catalyst is an ammonium chloride solution, the hydroxyl-functional phosphorus ester is selected from the group consisting of a mixed phosphate/phosphonate ester of CAS No. 70715-06-9 and a phosphate ester formed by reacting triethyl phosphate, phosphorus pentoxide, ethylene glycol and ethylene oxide, and the composition contains DMDHEU as the N-methylol functional resin.

13. A composition as claimed in Claim 1 wherein the curing catalyst comprises a mixture of magnesium dichloride and citric acid, the hydroxyl-functional phosphorus ester is selected from the group consisting of a mixed phosphate/phosphonate ester of CAS No. 70715-06-9 and a phosphate ester formed by reacting triethyl phosphate, phosphorus pentoxide, ethylene glycol and ethylene oxide, and the composition contains DMDHEU as the N-methylol functional resin.

14. A composition as claimed in Claim 1 wherein the curing catalyst is phosphorous acid, the hydroxyl-functional phosphorus ester is selected from the group consisting of a mixed phosphate/phosphonate ester of CAS No. 70715-06-9 and a phosphate ester formed by reacting triethyl phosphate, phosphorus pentoxide, ethylene glycol and ethylene oxide, and the composition contains DMDHEU as the N-methylol functional resin.


15. A composition as claimed in any of Claims 1-14 wherein the hydroxyl-functional phosphorus ester conforms to the following formula:



where R_1 is independently selected from alkyl and hydroxyalkyl, R_2 is independently selected from alkyl, alkoxy, and hydroxyalkoxy, and n is equal to or greater than 1.

- 5 16. A fabric that has been treated with the composition of any of Claims 1-15.

1/1

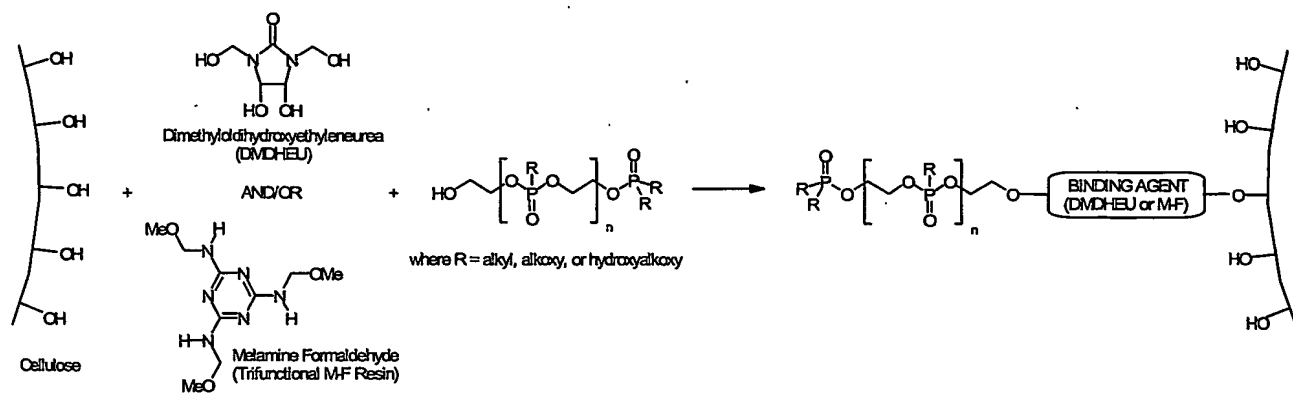

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number
WO 2004/001121 A3

- (51) International Patent Classification⁷: D06M 13/292, 13/358, 15/423
- (21) International Application Number: PCT/US2003/019761
- (22) International Filing Date: 20 June 2003 (20.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/390,860 20 June 2002 (20.06.2002) US
- (71) Applicants (for all designated States except US): UNIVERSITY OF GEORGIA RESEARCH FOUNDATION, INC. [US/US]; 621 Boyd Graduate Studies Research Center, Athens, GA 30602-7411 (US). AKZO NOBEL N.V. [NL/NL]; Velperweg 76, P.O. Box 9300, NL-6800 SB Arnhem (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): YANG, Charles, Q. [US/US]; 189 Elderberry Circle, Athens, GA 30605 (US). WU, Weidong [CN/US]; 110 Rogers Road, Apt. N206, Athens, GA 30605 (US). STOWELL, Jeffrey, K. [US/US]; 237 Mulberry Road, Ramsey, NJ 07446 (US). WEIL, Edward, D. [US/US]; 200 East 57th Street, Apt. 5L, New York, NY 10022 (US).
- (74) Agent: FENNELLY, Richard, P.; Akzo Nobel Inc., Intellectual Property Department, Dobbs Ferry, NY 10522-3408 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
- with international search report
 - before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (88) Date of publication of the international search report: 26 February 2004
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A DURABLE FLAME RETARDANT FINISH FOR CELLULOSIC MATERIALS

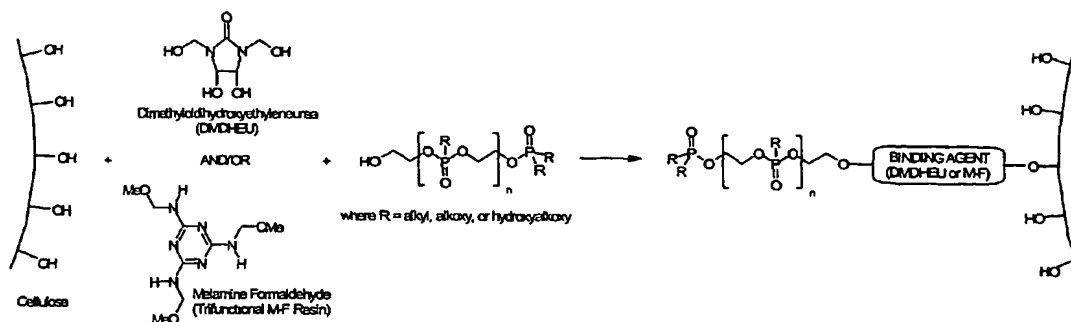

(57) Abstract: A composition, for treating a cellulosic material, contains a hydroxyl-functional phosphorus ester containing at least two phosphorus atoms therein, a melamine formaldehyde resin, optionally one or more N-methylol functional resin(s), and a curing catalyst.

WO 2004/001121 A3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/ us 03/19761

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D06M13/292 D06M13/358 D06M15/423

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D06M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 145 547 A (WEIL EDWARD D) 20 March 1979 (1979-03-20) examples	1,2,16
X	US 4 199 534 A (FEARING RALPH B) 22 April 1980 (1980-04-22) column 8, line 31 -column 9, line 45; examples	1,7-10, 15,16
X	EP 0 444 647 A (ALBRIGHT & WILSON) 4 September 1991 (1991-09-04) page 4, line 22 - line 26 page 5, line 34 -page 6, line 41; claims	1,6, 8-10,16
X	US 5 117 033 A (HARDY THOMAS A ET AL) 26 May 1992 (1992-05-26) column 2, line 57 - line 60 column 8, line 31 - line 65; examples	1,16
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

8 December 2003

Date of mailing of the international search report

17/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Koegler-Hoffmann, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 03/19761

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 962 603 A (HUTCHINGS DAVID A ET AL) 5 October 1999 (1999-10-05) the whole document ---	1-16
A	US 4 444 831 A (LEITNER GEORGE J) 24 April 1984 (1984-04-24) the whole document -----	1, 16

INTERNATIONAL SEARCH REPORT

II nation on patent family members

International Application No

PCT/us 03/19761

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4145547	A	20-03-1979	US 4044006 A	23-08-1977
US 4199534	A	22-04-1980	CA 1140567 A1	01-02-1983
			DD 143076 A5	30-07-1980
			DE 2963057 D1	29-07-1982
			DK 162979 A	21-10-1979
			EP 0005329 A1	14-11-1979
			IL 56877 A	30-09-1982
			JP 54140000 A	30-10-1979
			JP 58053657 B	30-11-1983
			JP 58117272 A	12-07-1983
			SU 952110 A3	15-08-1982
			US 4268633 A	19-05-1981
			ZA 7901374 A	30-04-1980
EP 0444647	A	04-09-1991	AT 125317 T	15-08-1995
			AU 642465 B2	21-10-1993
			AU 7198591 A	05-09-1991
			DE 69111263 D1	24-08-1995
			DE 69111263 T2	21-12-1995
			DK 444647 T3	04-09-1995
			EP 0444647 A1	04-09-1991
			ES 2077699 T3	01-12-1995
			GB 2241515 A , B	04-09-1991
			GR 3017569 T3	31-12-1995
			JP 5279665 A	26-10-1993
			KR 171899 B1	20-03-1999
			LT 1541 A , B	26-06-1995
			LV 11198 A	20-04-1996
			LV 11198 B	20-08-1996
			PL 289263 A1	02-12-1991
			US 5126387 A	30-06-1992
US 5117033	A	26-05-1992	US 4697030 A	29-09-1987
			US 4820854 A	11-04-1989
			US 4886895 A	12-12-1989
US 5962603	A	05-10-1999	AT 196491 T	15-10-2000
			AU 3591097 A	10-02-1998
			DE 69703160 D1	26-10-2000
			DE 69703160 T2	17-05-2001
			EP 0914390 A1	12-05-1999
			WO 9803594 A1	29-01-1998
US 4444831	A	24-04-1984	US 4404313 A	13-09-1983
			CA 1194655 A1	08-10-1985
			GB 2104931 A , B	16-03-1983
			US 4443903 A	24-04-1984

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.